


1" NAIL STRIP SNAP-LOCK STANDING SEAM

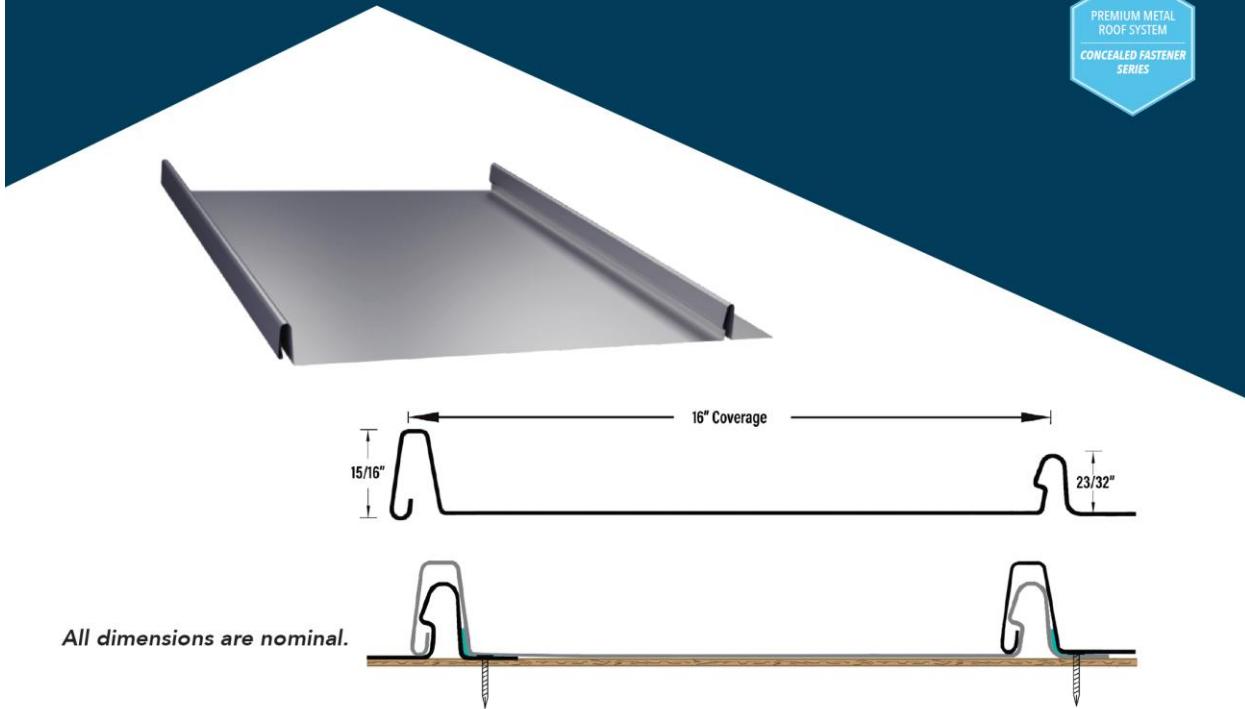

PRODUCT TESTING

- **Uplift Resistance:** UL 580, UL 1897, TAS 110, TAS 125
- **Wind-Driven Rain:** TAS 100
- **Tensile Strength:** ASTM E8
- **Fire Rating:** UL 790
- **Accelerated Coating:** ASTM G152
- **Salt Spray Coating:** ASTM B117
- **Florida Building Code:** Approved HVHZ/Non-HVHZ
- **Miami-Dade County:**
Product Control Approved

PRODUCT SPECIFICATIONS

- **Material:** 24, 26 gauge steel, .032, .040 aluminum
- **Slope[†]:** 2:12 or greater
- **Support:** 15/32-inch or greater plywood
- **Coverage:** 16 inches
- **Finish:** 70% PVDF (Kynar 500[®]), Tedlar[®] PVF film, mill-finished MaxAlúme
- **Sustainability:** LEED eligible[†]
- **Quality:** Keystone Quality Assurance Program, Miami-Dade Quality Assurance Program